


SINGLE INVERTER

- HIGH SPEED: $t_{PD} = 3.8$ ns (TYP.) at $V_{CC} = 5$ V
- LOW POWER DISSIPATION: $I_{CC} = 1\mu A(MAX.)$ at $T_A=25^{\circ}C$
- HIGH NOISE IMMUNITY: V_{NIH} = V_{NIL} = 28% V_{CC} (MIN.)
- POWER DOWN PROTECTION ON INPUT
- SYMMETRICAL OUTPUT IMPEDANCE: $|I_{OH}| = I_{OL} = 8\text{mA}$ (MIN) at $V_{CC} = 4.5\text{V}$
- BALANCED PROPAGATION DELAYS: t_{PLH} ≅ t_{PHL}
- OPERATING VOLTAGE RANGE: V_{CC}(OPR) = 2V to 5.5V
- IMPROVED LATCH-UP IMMUNITY

DESCRIPTION

The 74V1G04 is an advanced high-speed CMOS SINGLE INVERTER fabricated with sub-micron silicon gate and double-layer metal wiring C²MOS technology.

The internal circuit is composed of 3 stages including buffer output, which provide high noise immunity and stable output.




ORDER CODES

PACKAGE	T&R
SOT23-5L	74V1G04STR
SOT323-5L	74V1G04CTR


Power down protection is provided on input and 0 to 7V can be accepted on input with no regard to the supply voltage. This device can be used to interface 5V to 3V.

PIN CONNECTION AND IEC LOGIC SYMBOLS

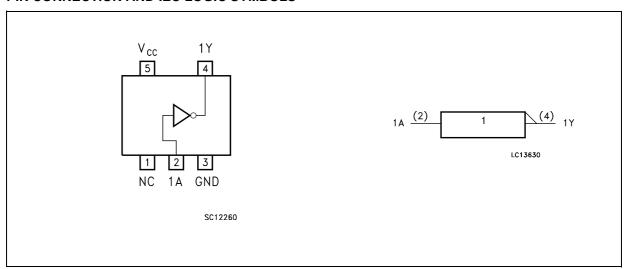

April 2004 1/9

INPUT EQUIVALENT CIRCUIT



PIN DESCRIPTION

PIN N°	SYMBOL	NAME AND FUNCTION
1	NC	Not Connected
2	1A	Data Input
4	1Y	Data Output
3	GND	Ground (0V)
5	V _{CC}	Positive Supply Voltage

TRUTH TABLE

Α	Υ
L	Н
Н	L

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CC}	Supply Voltage	-0.5 to +7.0	V
VI	DC Input Voltage	-0.5 to +7.0	V
Vo	DC Output Voltage	-0.5 to V _{CC} + 0.5	V
I _{IK}	DC Input Diode Current	- 20	mA
I _{OK}	DC Output Diode Current	± 20	mA
Io	DC Output Current	± 25	mA
I _{CC} or I _{GND}	DC V _{CC} or Ground Current	± 50	mA
T _{stg}	Storage Temperature	-65 to +150	°C
TL	Lead Temperature (10 sec)	260	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
V _{CC}	Supply Voltage	2 to 5.5	V
VI	Input Voltage	0 to 5.5	V
Vo	Output Voltage	0 to V _{CC}	V
T _{op}	Operating Temperature	-55 to 125	°C
dt/dv	Input Rise and Fall Time (note 1) (V _{CC} = 3.3 ± 0.3 V) (V _{CC} = 5.0 ± 0.5 V)	0 to 100 0 to 20	ns/V ns/V

1) V_{IN} from 30% to 70% of V_{CC}

DC SPECIFICATIONS

		Test Condition		Value							
Symbol	Parameter	V _{CC}		T	T _A = 25°C		C -40 to		-55 to	125°C	Unit
		(V)		Min.	Тур.	Max.	Min.	Max.	Min.	Max.	
V _{IH}	High Level Input	2.0		1.5			1.5		1.5		
	Voltage	3.0 to 5.5		0.7V _{CC}			0.7V _{CC}		0.7V _{CC}		V
V_{IL}	Low Level Input	2.0				0.5		0.5		0.5	
	Voltage	3.0 to 5.5				0.3V _{CC}		0.3V _{CC}		0.3V _{CC}	V
V _{OH}	High Level Output	2.0	I _O =-50 μA	1.9	2.0		1.9		1.9		
	Voltage	3.0	I _O =-50 μA	2.9	3.0		2.9		2.9		
		4.5	I _O =-50 μA	4.4	4.5		4.4		4.4		V
		3.0	I _O =-4 mA	2.58			2.48		2.4		
		4.5	I _O =-8 mA	3.94			3.8		3.7		
V _{OL}	Low Level Output	2.0	I _O =50 μA		0.0	0.1		0.1		0.1	
	Voltage	3.0	I _O =50 μA		0.0	0.1		0.1		0.1	
		4.5	I _O =50 μA		0.0	0.1		0.1		0.1	V
		3.0	I _O =4 mA			0.36		0.44		0.55	
		4.5	I _O =8 mA			0.36		0.44		0.55	
I _I	Input Leakage Current	0 to 5.5	V _I = 5.5V or GND			± 0.1		± 1		± 1	μΑ
I _{CC}	Quiescent Supply Current	5.5	$V_I = V_{CC}$ or GND			1		10		20	μΑ

AC ELECTRICAL CHARACTERISTICS (Input $t_r = t_f = 3ns$)

		Test Condition		Value								
Symbol Parameter	Parameter	v _{cc}	CL		T _A = 25°C			-40 to 85°C		-55 to 125°C		Unit
	V _{CC} C _L (pF)		Min.	Тур.	Max.	Min.	Max.	Min.	Max.			
t _{PLH} t _{PHL}	Propagation Delay	3.3 ^(*)	15			5.0	7.0	1.0	8.5	1.0	9.5	
	Time	3.3 ^(*)	50			6.1	9.0	1.0	10.5	1.0	11.5	nc
	5.0 ^(**)	15			3.8	5.5	1.0	6.5	1.0	7.5	ns	
		5.0 ^(**)	50			4.7	7.5	1.0	8.5	1.0	9.5	

^(*) Voltage range is $3.3V \pm 0.3V$ (**) Voltage range is $5.0V \pm 0.5V$


CAPACITIVE CHARACTERISTICS

		Test Condition		Value						
Symbol	Parameter	rameter T _A = 25°C -		-40 to	85°C	-55 to 125°C		Unit		
			Min.	Тур.	Max.	Min.	Max.	Min.	Max.	
C _{IN}	Input Capacitance			4	10		10		10	pF
C _{PD}	Power Dissipation Capacitance (note 1)			10						pF

¹⁾ C_{PD} is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation. I_{CC(opr)} = C_{PD} x V_{CC} x f_{IN} + I_{CC}




TEST CIRCUIT

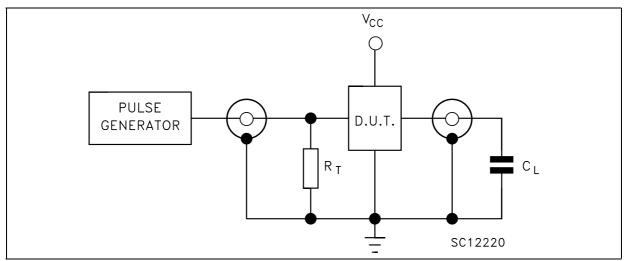


 C_L =15/50pF or equivalent (includes jig and probe capacitance) R_T = Z_{OUT} of pulse generator (typically 50 Ω)

WAVEFORM: PROPAGATION DELAY (f=1MHz; 50% duty cycle)

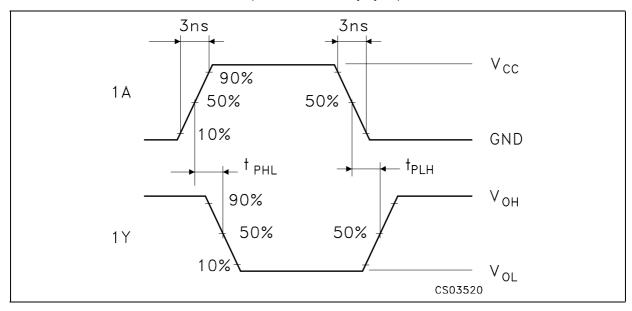


SOT23-5L MECHANICAL DATA

DIM		mm.		mils			
DIM.	MIN.	TYP	MAX.	MIN.	TYP.	MAX.	
А	0.90		1.45	35.4		57.1	
A1	0.00		0.10	0.0		3.9	
A2	0.90		1.30	35.4		51.2	
b	0.35		0.50	13.7		19.7	
С	0.09		0.20	3.5		7.8	
D	2.80		3.00	110.2		118.1	
E	1.50		1.75	59.0		68.8	
е		0.95			37.4		
Н	2.60		3.00	102.3		118.1	
L	0.10		0.60	3.9		23.6	

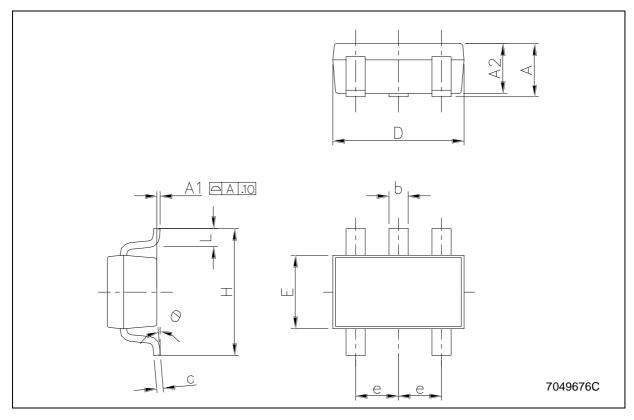


SOT323-5L MECHANICAL DATA

DIM		mm.		mils				
DIM.	MIN.	TYP	MAX.	MIN.	TYP.	MAX.		
А	0.80		1.10	31.5		43.3		
A1	0.00		0.10	0.0		3.9		
A2	0.80		1.00	31.5		39.4		
b	0.15		0.30	5.9		11.8		
С	0.10		0.18	3.9		7.1		
D	1.80		2.20	70.9		86.6		
E	1.80		2.40	70.9		94.5		
E1	1.15		1.35	45.3		53.1		
е		0 .65			25.6			
e1		1.3			51.2			
L	0.10		0.30	3.9		11.8		

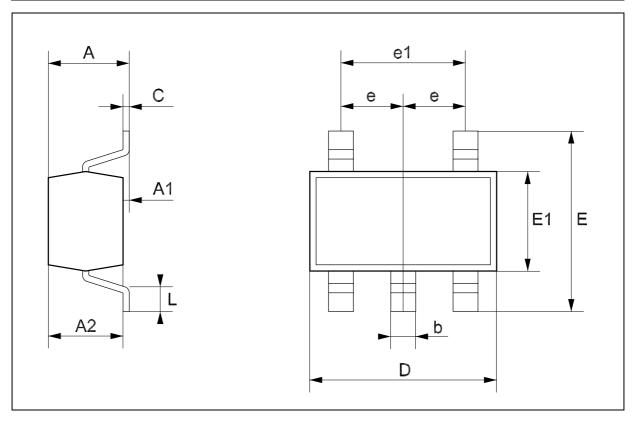


Tape & Reel SOT23-xL MECHANICAL DATA

DIM.		mm.		inch				
DIWI.	MIN.	TYP	MAX.	MIN.	TYP.	MAX.		
А			180			7.086		
С	12.8	13.0	13.2	0.504	0.512	0.519		
D	20.2			0.795				
N	60			2.362				
Т			14.4			0.567		
Ao	3.13	3.23	3.33	0.123	0.127	0.131		
Во	3.07	3.17	3.27	0.120	0.124	0.128		
Ko	1.27	1.37	1.47	0.050	0.054	0.0.58		
Po	3.9	4.0	4.1	0.153	0.157	0.161		
Р	3.9	4.0	4.1	0.153	0.157	0.161		

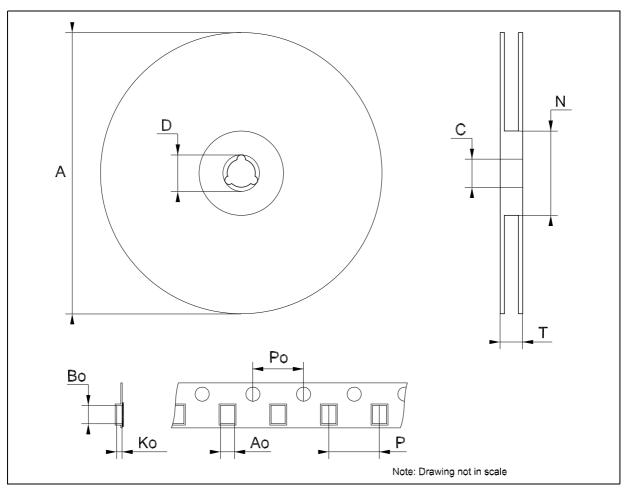

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
А	175	180	185	6.889	7.086	7.283
С	12.8	13	13.2	0.504	0.512	0.519
D	20.2			0.795		
N	59.5	60	60.5		2.362	
Т			14.4			0.567
Ao		2.25			0.088	
Во		2.7			0.106	
Ko		1.2			0.047	
Ро	3.9	4	4.1	0.153	0.157	0.161
Р	3.8	4	4.2	0.149	0.157	0.165

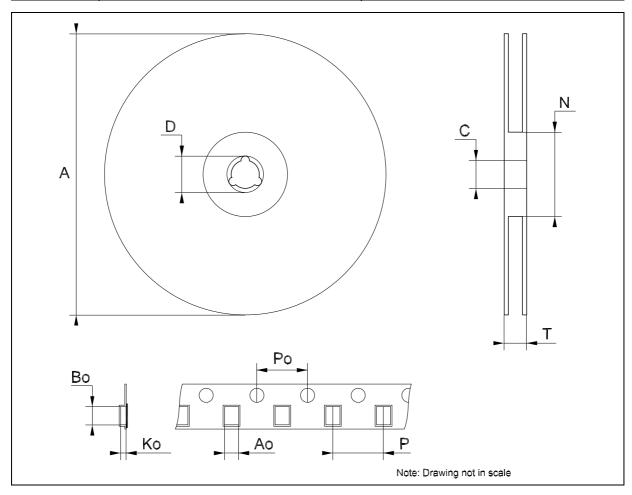

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

http://www.st.com

